




CONVENTIONAL BATTERY



แถม ทุกสภาพถนน ทนทุกสภาวะอากาศ

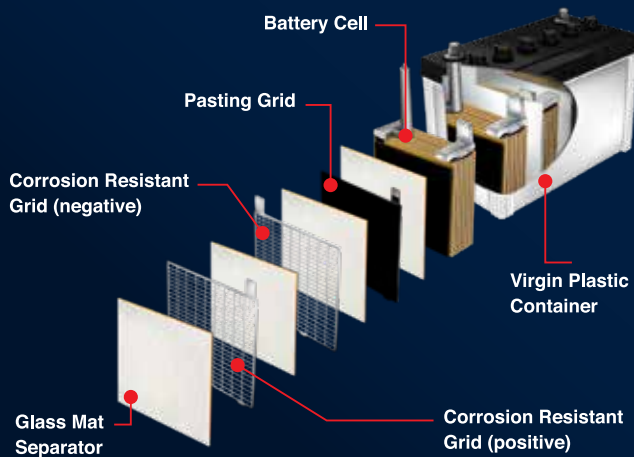

- Low maintenance battery
- Higher starting performance
- Longer lifetime

LOW MAINTENANCE

JIS product specification

Low Maintenance Automotive Battery					Dimension (mm)				Weight	Acid/Unit
Model	Model Dimension	Capacity at 20 hr (Ah)	CCA (IEC)	Terminal Direction	L	W	H	TH	KGS.	Liter
12N24-3	12N24	26	210	C	185	125	160	174	5.2	1.8
12N24-4	12N24	26	210	C	185	125	160	174	5.2	1.8
NS40 R,L	B20	32	200	B	196	127	200	224	6.1	2.8
NS40Z R,L	B20	35	260	B	196	127	200	224	7.2	2.5
NS60 R,L	B24	45	295	B	236	127	200	224	8.2	3.0
N50	D26	50	300	A	258	171	200	224	9.2	5.4
N50Z R,L	D26	60	370	A	258	171	200	224	11.0	5.2
NS80 R,L	D26	65	490	A	258	171	200	224	12.3	5.0
N70	D31	70	380	A	304	171	200	224	12.6	5.4
NS100 R,L	D31	75	440	A	304	171	200	224	14.8	5.0
NS120 R,L	D31	85	570	A	304	171	200	224	15.9	5.4
105D31 R,L	D31	90	655	A	304	171	200	224	17.1	6.5
N100	E41	100	475	E	407	174	209	232	17.0	5.0
N120A	F51	110	500	E	502	181	210	238	19.6	9.5
N120	F51	120	575	E	502	181	210	238	21.6	9.5
N150A	G51	140	600	E	505	221	210	255	23.4	12.0
N150(EARS)	G51	150	685	E	505	221	210	238	25.5	11.5
N150 R,L	G51	150	685	E	505	221	210	255	25.5	11.5
4DLT	4DLT	135	550	E	506	207	179	203	22.3	10.2
N200A	H52	190	700	E	518	278	216	265	31.3	15.5
N200	H52	200	765	E	518	278	216	265	33.0	15.0

DIN product specification

Low Maintenance Automotive Battery					Dimension (mm)				Weight	Acid/Unit
Model	Model Dimension	Capacity at 20 hr (Ah)	CCA (IEC)	Base hold down	L	W	H	TH	KGS.	Liter
DIN65 R,L	DIN55	65	540	B3	243	174	187	187	10.8	3.3
DIN75	DIN88	75	680	B3	277	174	189	189	12.2	4.0
DIN100	DIN100	100	850	B3	352	174	189	189	14.9	6.2
67018(SPK)	DIN B	180	775	-	513	223	198	218	32.7	11.5